



MEYER BURGER
TURKEY & BULGARIA

EXPOb2b
ENERGY

Meyer Burger Technology AG
Turkey & Bulgaria



Heterojunction Bifacial Module

Up to 20 percent more energy yield

Be ready to shine.



MEYER BURGER



Meyer Burger Technology AG
Türkiye & Bulgaria Distributor



Meyer Burger Glass

Heterojunction Bifacial Module



Maximum performance:

Up to 20 percent more energy yield – even in low-light conditions, such as in the morning and evening hours or with cloudy skies




Maximum quality:

Production of solar cells and modules according to the highest standards and exclusively in Germany



Maximum durability:

Guaranteed yields for decades



Maximum stability:

Patented SmartWire technology makes the modules extremely rugged and efficient




Maximum elegance: Understated and superb design invented in Switzerland



MEYER BURGER

Turkey & Bulgaria Business Partner
EXPOb2b International Group
Armada İş Kule Kat12, No18
Beştepe Ankara Turkey
Tel +[90] 312 4272727
E center@expob2b.de

www.expob2b.de

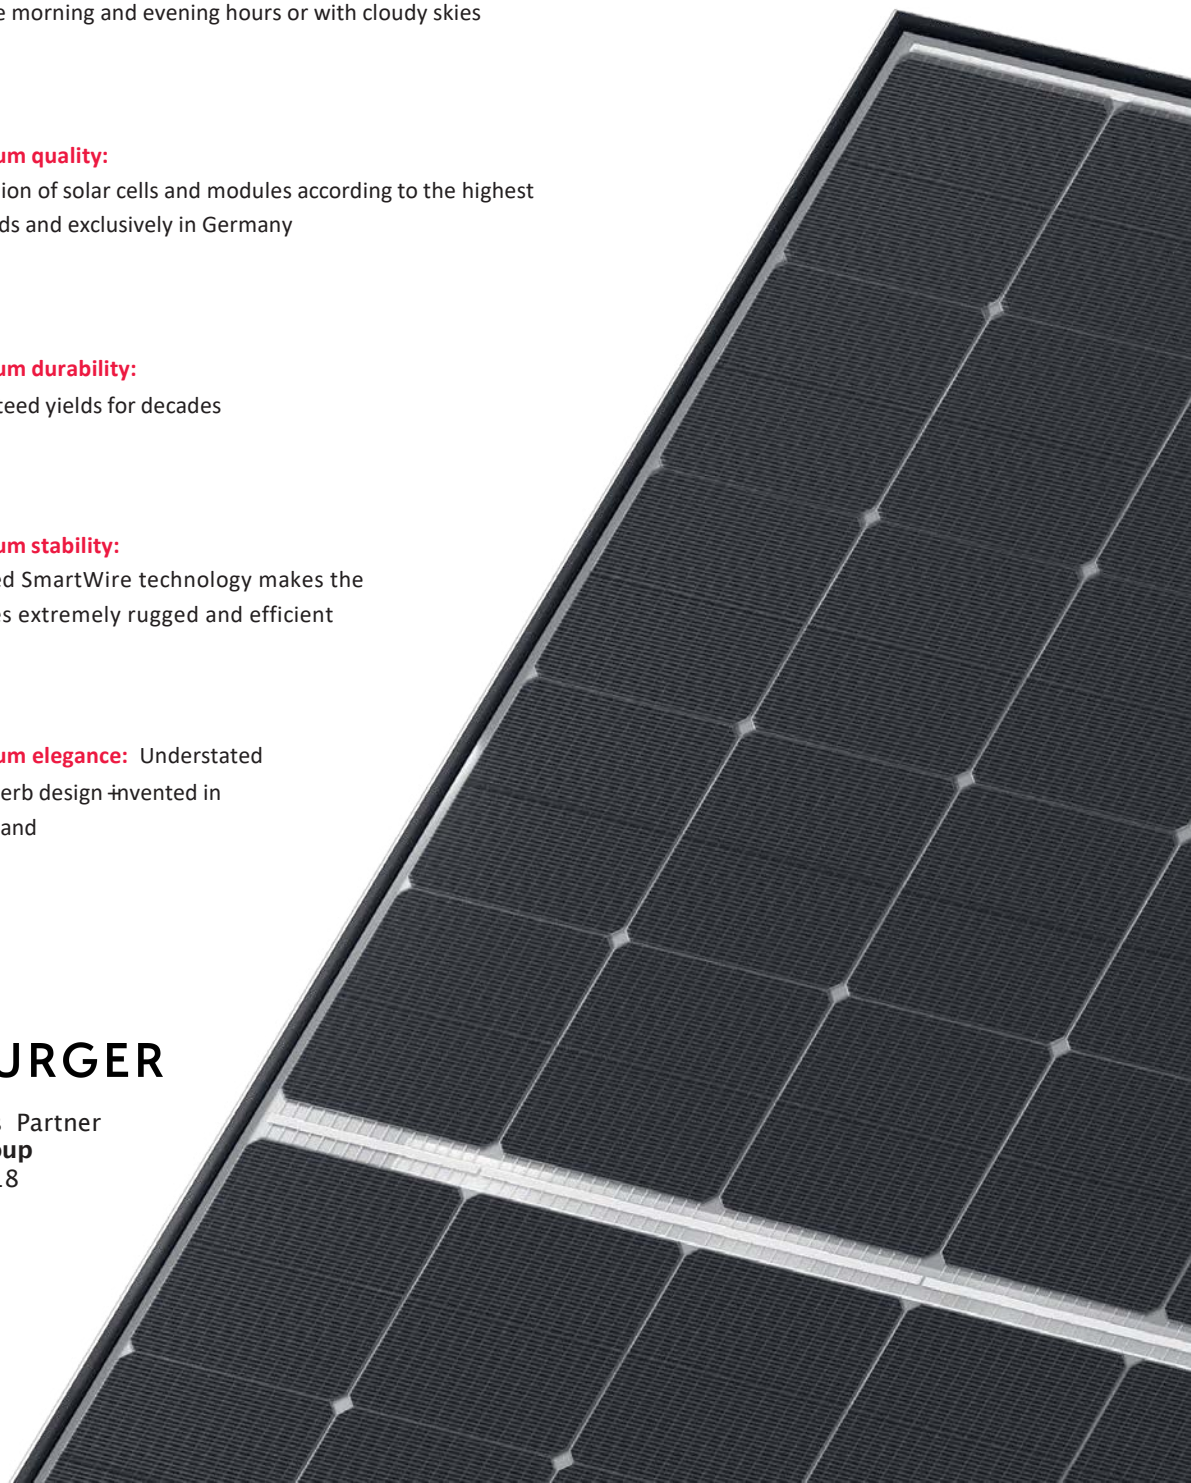



MEYER BURGER




Meyer Burger Technology AG Türkiye & Bulgaria Distributor



MECHANICAL SPECIFICATION

Dimensions [mm]	1,722 x 1,041 x 35
Weight [kg]	24.4
Front glass	Solar glass, 2.1 mm, with anti-reflective surface
Back glass	Solar glass, 2.1 mm
Frame	Anodized aluminum (black)
Solar cell type	120 half-cut, mono n-Si, HJT
Junction boxes	3 diodes, IP68 rated, in accordance with IEC 62790
Cable	PV cable 4 mm ² , 1.2 m length, in accordance with EN 50618
Connectors	MC4-Evo2, in accordance with IEC 62852, IP68 rated only when connected

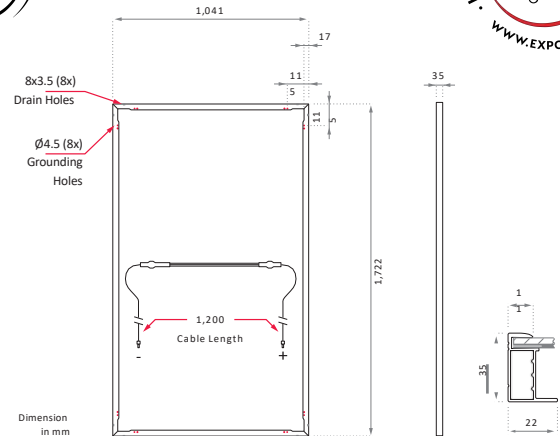

ELECTRICAL SPECIFICATION¹

Power class in STC ² [W _p]			370		375		380		385		390	
Minimum Performance (Power Tolerance -0 W/+5 W) [W _p]			STC	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	Power at MPP	P _{MPP} [W]	370	284	375	286	380	291	385	295	390	296
E	Short Circuit Current	I _{sc} [A]	10.4	8.4	10.4	8.4	10.5	8.5	10.6	8.6	10.7	8.6
	Open Circuit Voltage	V _{oc} [V]	44.5	41.9	44.6	42.0	44.7	42.1	44.7	42.1	44.7	42.1
M	Current at MPP	I _{MPP} [A]	9.9	8.0	9.9	8.0	10.0	8.1	10.1	8.2	10.2	8.2
	Voltage at MPP	V _{MPP} [V]	37.7	35.5	37.9	35.7	38.1	35.9	38.2	36.0	38.3	36.1
	Efficiency	η [%]	20.6		20.9		21.2		21.5		21.8	

Bifacial Specifications

Bifaciality Factor	[%]	90±2
--------------------	-----	------


Power with rear irradiation [W/m ²] ^{4,5}	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]	P _{max} [W]	I _{sc} [A]
Bifi50	386	10.9	391	10.9	396	11.0	401	11.1	406	11.2
Bifi100	403	11.3	408	11.3	413	11.4	418	11.5	423	11.6
BSTC ⁵	414	11.6	419	11.6	424	11.7	429	11.8	434	11.9
Bifi200	436	12.2	441	12.2	446	12.3	451	12.4	456	12.5
Bifi250	452	12.7	457	12.7	462	12.8	467	12.9	472	13.0

Temperature Coefficients

Temperature Coefficient of I _{sc}	α	[%/°C]	+0.033
Temperature Coefficient of V _{oc}	β	[%/°C]	-0.234
Temperature Coefficient of P _{MPP}	γ	[%/°C]	-0.259
Nominal Module Operating Temperature	NMOT	[°C]	43±3

The temperature coefficients stated are linear values

Performance at different irradiance

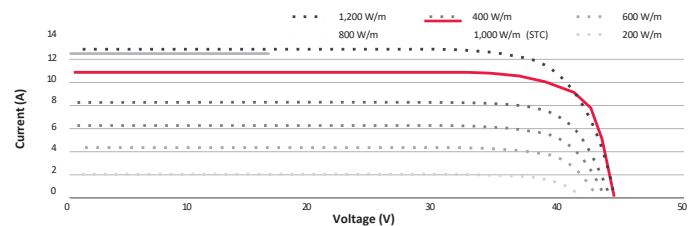

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	[V]	1,500
Maximum Series Fuse Rating	[A]	18
Max. Test Load +/-, (incl. Safety Factor of 1.5)	[Pa]	5,400/2,400
Fire Class (classification pending)		C
Operation Temperature	°C	-40 to +85

MEYER BURGER WARRANTY

Product Warranty [y]	30
Power Warranty [y]	30
Power after 1 year	≥99% of nominal power
Annual Degradation [%/y]	0.20
Power after 30 years	≥93.2% of nominal power

Warranty conditions apply

CERTIFICATES

Certifications (pending)

IEC 61215:2016, IEC 61730:2016

Certifications (to come)

UL16730-1, UL 16730-2, PID (IEC 62804), Salt Mist (IEC 61701), Ammonia Resistance (IEC 62716), Dynamical Mechanical Load (IEC, 62782:2016), Dust & Sand (IEC 60068)

Notice: All data and specifications are preliminary and subject to change without notice.



Reg.-Nr. DE 18170271

¹ Measurement according to IEC 60904-3, measurement tolerance: ±3%, monofacial measurement with rear side covered
² STC: Irradiance 1000 W/m², 25 °C, AM1.5 Spectrum
³ NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5 Spectrum, 20 °C, wind speed 1 m/s
⁴ According to IEC TS 60904-1-2, with rear irradiances of 50, 100, 200 and 250 W/m² WEEE-
⁵ According to TÜV 2 PFG 2645/11.17, with a rear irradiance of 135 W/m²



MEYER BURGER



Meyer Burger Technology AG
Türkiye & Bulgaria Distributor



Meyer Burger Black

Heterojunction Module



Maximum performance:

Up to 20 percent more energy yield – even in low-light conditions, such as in the morning and evening hours or with cloudy skies



Maximum quality:

Production of solar cells and modules according to the highest standards and exclusively in Germany



Maximum durability:

Guaranteed yields for decades



Maximum stability:

Patented SmartWire technology makes the modules extremely rugged and efficient




Maximum elegance: Understated and superb design invented in Switzerland



MEYER BURGER

Turkey & Bulgaria Business Partner
EXPOb2b International Group
Armada İş Kule Kat12, No18
Beştepe Ankara Turkey
Tel +[90] 312 4272727
E center@expob2b.de

www.expob2b.de

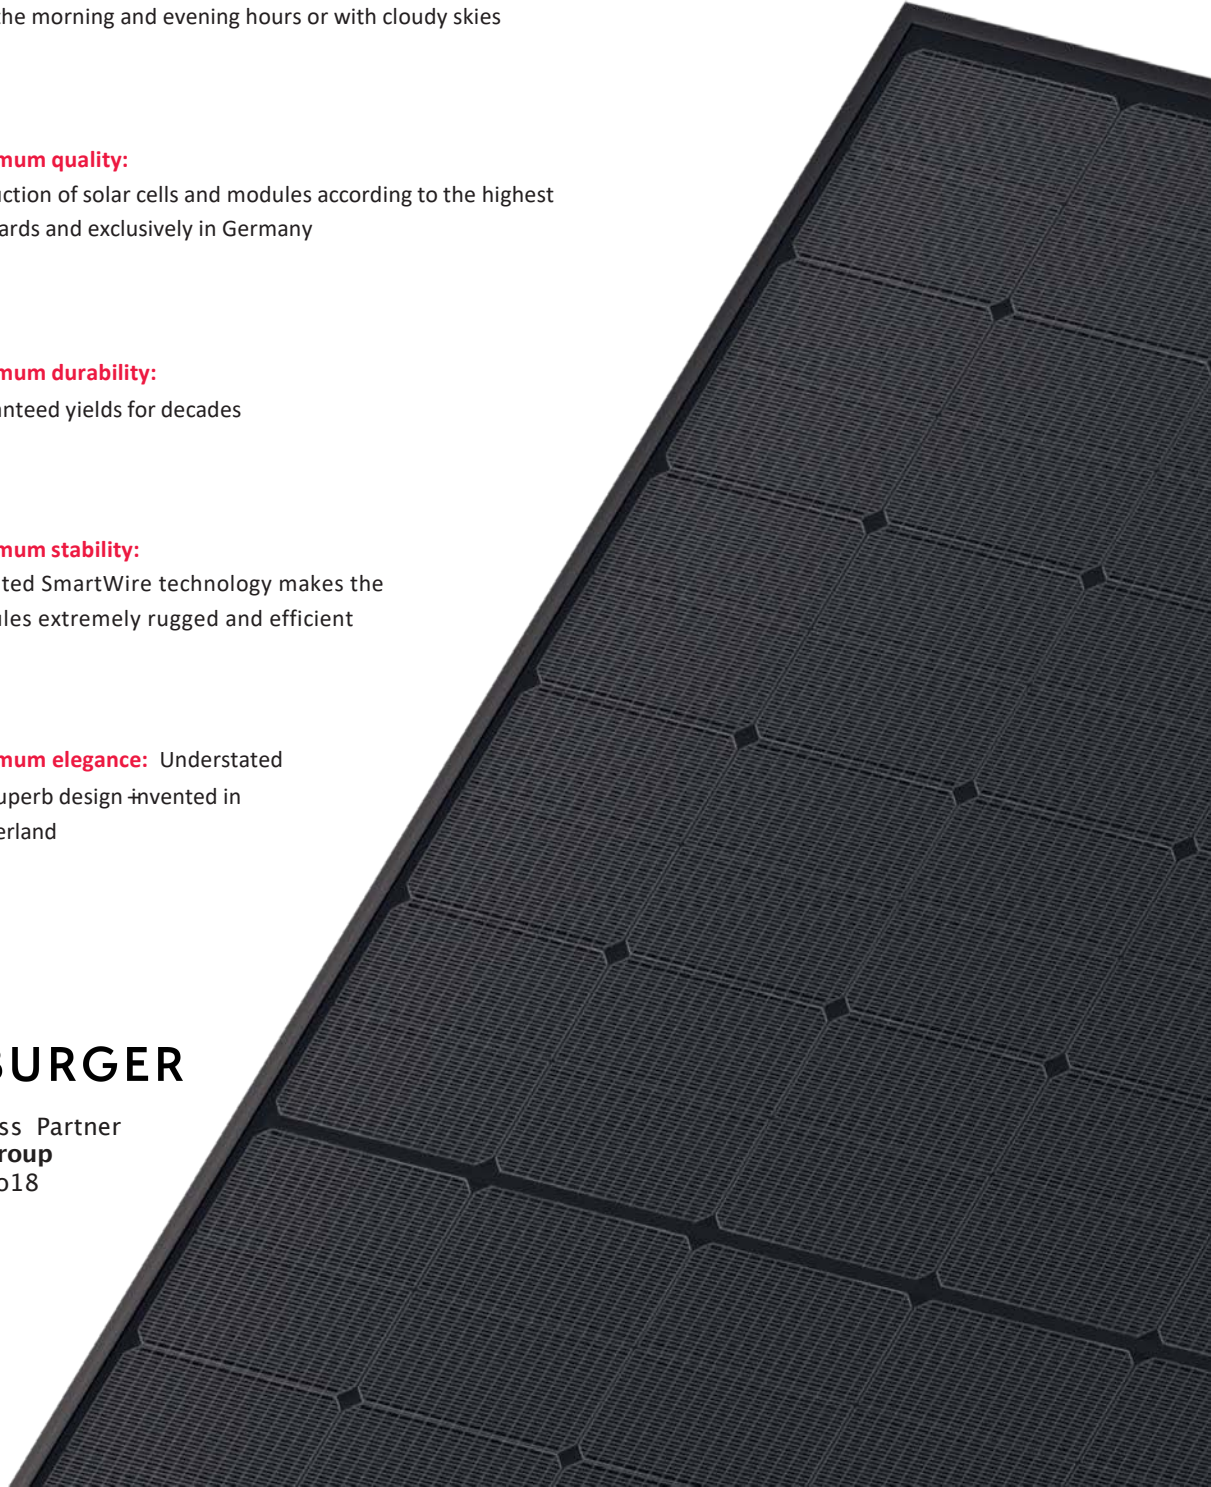



MEYER BURGER




Meyer Burger Technology AG Türkiye & Bulgaria Distributor



MECHANICAL SPECIFICATION

Dimensions [mm]	1,767 x 1,041 x 35
Weight [kg]	19.7
Front glass	Solar glass, 3.2 mm, with anti-reflective surface
Back glass	High-barrier construction, black
Frame	Anodized aluminum (black)
Solar cell type	120 half-cut, mono n-Si, HJT
Junction boxes	3 diodes, IP68 rated, in accordance with IEC 62790
Cable	PV cable 4 mm ² , 1.2 m length, in accordance with EN 50618 Connectors MC4, in accordance with IEC 62852, IP68 rated only when connected

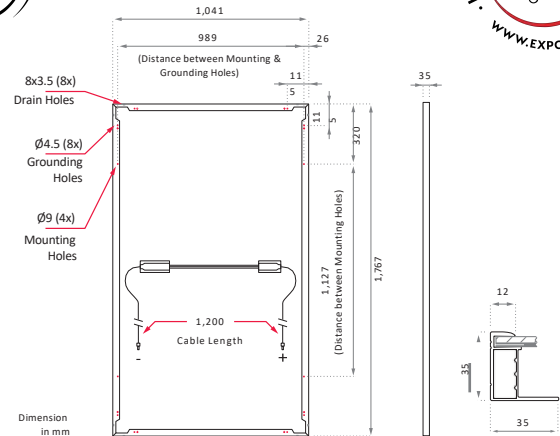

ELECTRICAL SPECIFICATION¹


Power class in STC ² [W _p]	375		380		385		390		395			
Minimum Performance (Power Tolerance -0 W/+5 W) [W _p]	STC	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT		
Power at MPP	P_{mpp}	[W]	375	286	380	292	385	297	390	298	395	303
Short Circuit Current	I_{sc}	[A]	10.6	8.6	10.6	8.6	10.7	8.6	10.8	8.7	10.9	8.8
Open Circuit Voltage	V_{oc}	[V]	44.5	41.9	44.6	42.0	44.6	42.0	44.7	42.1	44.7	42.1
Current at MPP	I_{mpp}	[A]	9.9	8.0	10.0	8.1	10.1	8.2	10.2	8.2	10.3	8.3
Voltage at MPP	V_{mpp}	[V]	38.0	35.8	38.2	36.0	38.4	36.2	38.5	36.3	38.7	36.5
Efficiency	η	[%]	20.4		20.7		20.9		21.2		21.5	

Temperature Coefficients

Temperature Coefficient of I_{sc}	α	[%/°C]	+0.033
Temperature Coefficient of V_{oc}	β	[%/°C]	-0.234
Temperature Coefficient of P_{mpp}	γ	[%/°C]	-0.259
Nominal Module Operating Temperature	NMOT ³	[°C]	44±2

The temperature coefficients stated are linear values

Performance at different irradiance

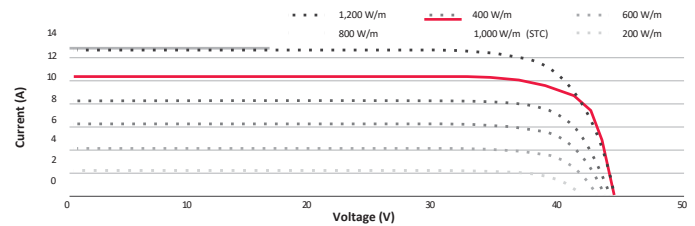

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	15
Max. Test Load +/-, (incl. Safety Factor of 1.5)	[Pa]	6,000/4,000
Fire Class (classification pending)		C
Operating Temperature	°C	-40 to +85

MEYER BURGER WARRANTY

Product Warranty [y]	25
Power Warranty [y]	25
Power after 1 year	≥98% of nominal power
Annual Degradation [%/y]	0.25
Power after 25 years	≥92% of nominal power

Warranty conditions apply

CERTIFICATES

Certifications (pending)

IEC 61215:2016, IEC 61730:2016

Certifications (to come)

UL61730-1, UL 61730-2, PID (IEC 62804), Salt Mist (IEC 61701), Ammonia Resistance (IEC 62716), Dynamical Mechanical Load (IEC, 62782:2016), Dust & Sand (IEC 60068)

Notice: All data and specifications are preliminary and subject to change without notice.



Reg.-Nr. DE 18170271

¹ Measurement according to IEC 60904-3, measurement tolerance: ±3%, monofacial measurement with rear side covered
² STC: Irradiance 1000 W/m², 25 °C, AM1.5 Spectrum
³ NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5 Spectrum, 20 °C, WEEE-wind speed 1 m/s



MEYER BURGER



Meyer Burger Technology AG
Türkiye & Bulgaria Distributor



Meyer Burger White

Heterojunction Module



Maximum performance:

Up to 20 percent more energy yield – even in low-light conditions, such as in the morning and evening hours or with cloudy skies



Maximum quality:

Production of solar cells and modules according to the highest standards and exclusively in Germany



Maximum durability:

Guaranteed yields for decades



Maximum stability:

Patented SmartWire technology makes the modules extremely rugged and efficient




Maximum elegance: Understated and superb design invented in Switzerland



MEYER BURGER

Turkey & Bulgaria Business Partner
EXPOb2b International Group
Armada İş Kule Kat12, No18
Beştepe Ankara Turkey
Tel +[90] 312 4272727
E center@expob2b.de

www.expob2b.de

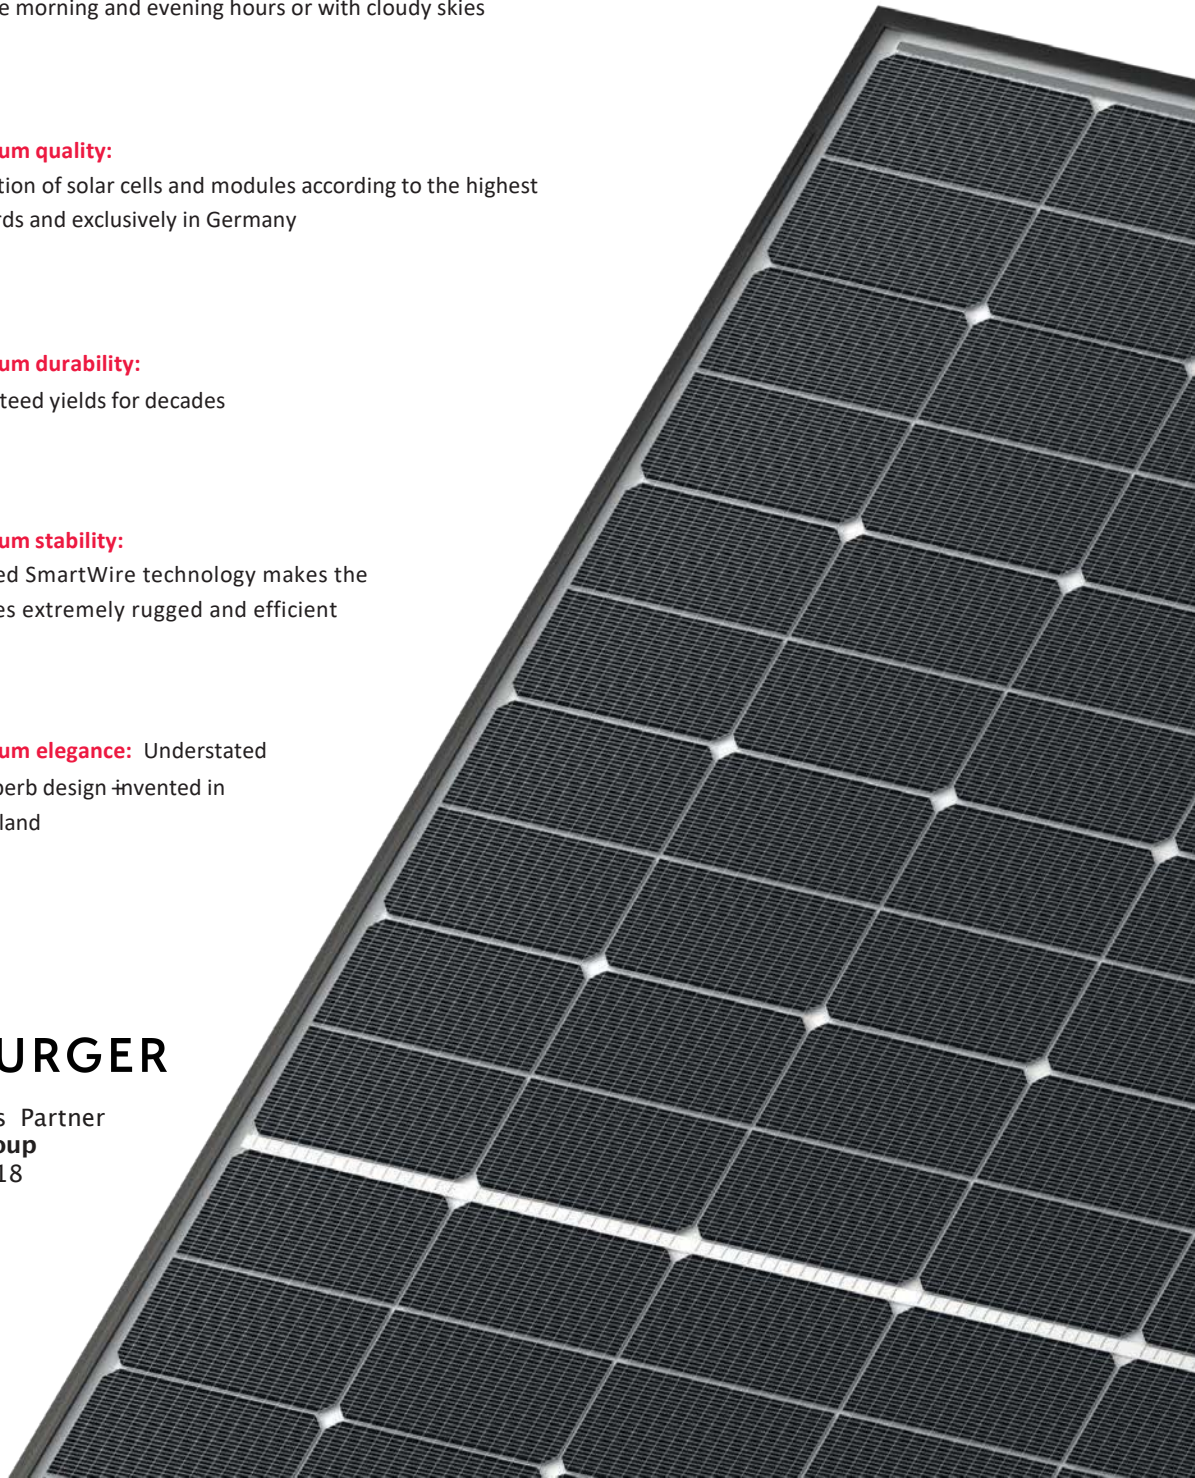



MEYER BURGER




Meyer Burger Technology AG Türkiye & Bulgaria Distributor



MECHANICAL SPECIFICATION

Dimensions [mm]	1,767 x 1,041 x 35
Weight [kg]	19.7
Front glass	Solar glass, 3.2 mm, with anti-reflective surface
Back glass	High-barrier construction, white
Frame	Anodized aluminum (black)
Solar cell type	120 half-cut, mono n-Si, HJT
Junction boxes	3 diodes, IP68 rated, in accordance with IEC 62790
Cable	PV cable 4 mm ² , 1.2 m length, in accordance with EN 50618 Connectors MC4, in accordance with IEC 62852, IP68 rated only when connected

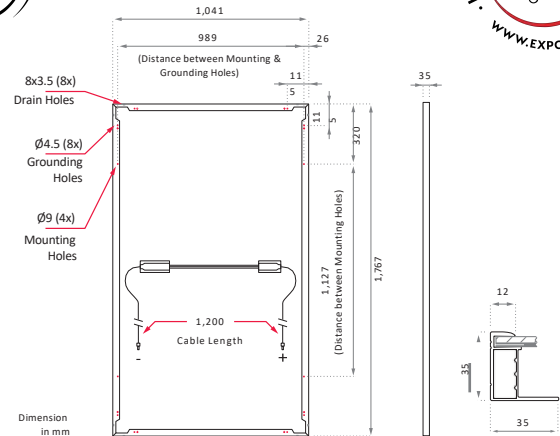

ELECTRICAL SPECIFICATION¹


Power class in STC ² [W _p]			380		385		390		395		400	
Minimum Performance (Power Tolerance -0 W/+5 W) [W _p]			STC	NMOT ³	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power at MPP	P_{mpp}	[W]	380	291	385	294	390	299	395	301	400	306
Short Circuit Current	I_{sc}	[A]	10.8	8.7	10.9	8.8	10.9	8.8	11.0	8.9	11.1	9.0
Open Circuit Voltage	V_{oc}	[V]	44.4	41.8	44.5	41.9	44.5	41.9	44.6	42.0	44.7	42.1
Current at MPP	I_{mpp}	[A]	10.3	8.3	10.3	8.3	10.4	8.4	10.4	8.4	10.5	8.5
Voltage at MPP	V_{mpp}	[V]	37.2	35.1	37.6	35.4	37.8	35.6	38.0	35.8	38.2	36.0
Efficiency	η	[%]	20.7		20.9		21.2		21.5		21.7	

Temperature Coefficients

Temperature Coefficient of I_{sc}	α	[%/°C]	+0.033
Temperature Coefficient of V_{oc}	β	[%/°C]	-0.234
Temperature Coefficient of P_{mpp}	γ	[%/°C]	-0.259
Nominal Module Operating Temperature	NMOT ³	[°C]	44±2

The temperature coefficients stated are linear values

Performance at different irradiance

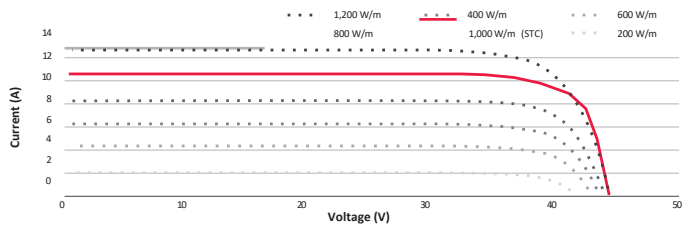

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	15
Max. Test Load +/-, (incl. Safety Factor of 1.5)	[Pa]	6,000/4,000
Fire Class (classification pending)		C
Operation Temperature	°C	-40 to +85

MEYER BURGER WARRANTY

Product Warranty [y]	25
Power Warranty [y]	25
Power after 1 year	≥98% of nominal power
Annual Degradation [%/y]	0.25
Power after 25 years	≥92% of nominal power

Warranty conditions apply

CERTIFICATES

Certifications (pending)

IEC 61215:2016, IEC 61730:2016

Certifications (to come)

UL61730-1, UL 61730-2, PID (IEC 62804), Salt Mist (IEC 61701), Ammonia Resistance (IEC 62716), Dynamical Mechanical Load (IEC, 62782:2016), Dust & Sand (IEC 60068)

Notice: All data and specifications are preliminary and subject to change without notice.



Reg.-Nr. DE 18170271

¹ Measurement according to IEC 60904-3, measurement tolerance: ±3%, monofacial measurement with rear side covered
² STC: Irradiance 1000 W/m², 25 °C, AM1.5 Spectrum
³ NMOT: Nominal Module Operating Temperature, with irradiance 800 W/m², AM1.5 Spectrum, 20 °C, WEEE-wind speed 1 m/s



Meyer Burger Technology AG
Turkey & Bulgaria Distributor



MEYER BURGER
TURKEY & BULGARIA

Be ready to shine.

Heterojunction Bifacial Module
Up to 20 percent more energy yield



EXPOb2b International Group
Adres : Armada İş Kule Kat12, No18 Beştepe Ankara Turkey
Tel : +[90] 312 4272727

Meyer Burger Technology AG Turkey & Bulgaria Distributor expob2b.de

center@expob2b.d